

6. Григоренко Я. М. Розв'язання задач теорії оболонок на основі дискретно-континуальних методів : навчальний посібник / Я. М. Григоренко, В. Д. Будак, О. Я. Григоренко. – Миколаїв : Ліон, 2010. – 294 с.
7. Godunov S. K. Numerical solution of boundary-value problems for systems of linear ordinary differential equations / S. K. Godunov // Usp. Mat. Nauk. – 1961. – 16, No. 3. – P. 171–174.

### REFERENCES

1. Grigorenko, Ya.M., Kryukov, N.N. AND Yakovenko, N.S. (2005), “Using spline-functions to solve boundary-value problems for laminated orthotropic trapezoidal plates of variable thickness”, *Int. Appl. Mech.*, **41**, no. 4, pp. 413–420.
2. Grigorenko, A.Ya. et al. (2016), *Recent Developments in Anisotropic Heterogeneous Shell Theory*, vol. 1, SpringerBriefs in Applied Sciences and Technology. Continuum Mechanics.
3. Kryukov, N.N. (1997), “Design of oblique and trapezoidal plates using spline functions”, *Prikl. Mekh.*, **33**, no. 5, p. 3–27.
4. Shufrin, I., Rabinovitch, O. and Eisenberger, M. (2010), “A semi-analytical approach for the geometrically nonlinear analysis of trapezoidal plates”, *International Journal of Mechanical Sciences*, **52**, pp. 1588–1596.
5. Shahidi, A.R., Mahzoon, M., Saadatpour, M.M. and Azhari, M. (2007), “Nonlinear static analysis of arbitrary quadrilateral plates in very large deflections”, *Communications in Nonlinear Science and Numerical Simulation*, **12**, pp. 832–848.
6. Grigorenko, Ya.M., Budak, V.D. and Grigorenko, A.Ya. (2010), *Rozv'yazannya zadach teoriyi obolonok na osnovi dyskretno-kontynual'nykh metodiv* [Solving the problems of shells based on discrete-continuous methods] Ilion, Nikolaev.
7. Godunov S.K. (1961), “Numerical solution of boundary-value problems for systems of linear ordinary differential equations,” *Usp. Mat. Nauk*, **16**, no. 3, pp. 171–174.

УДК 539.3

## NONLINEAR DYNAMIC ANALYSIS OF FUNCTIONALLY GRADED SHALLOW SHELLS WITH TIME DEPENDENT PARAMETERS UNDER STATIC LOADING

Gristchak V. Z., Dr. Techn. Sci., professor, Fatieieva Yu. A., PhD student

*Zaporizhzhya national university,  
Zhukovsky str., 66, Zaporizhzhya, 69600, Ukraine*

fateevajulia@gmail.com

This paper deals with research of nonlinear vibration of imperfect shallow shells made of functionally graded materials (FGM) with thickness dependent from time under static and dynamic loadings. The material properties are changing in the thickness direction according to the given power law distribution and the non-linear strain-displacement relationships based on the von Karman theory for moderately large normal deflections. Initial nonlinear system of differential equations transforms to singular ordinary differential equations with variable in time coefficients, which is solved by hybrid perturbation and WKB-Galerkin methods in three steps. Comparison of numerical integration of initial equation and approximate analytical solutions are given.

*Key words: Asymptotic approach, nonlinear dynamic problem, FGM shallow shells, time dependent parameters.*

## НЕЛІНІЙНИЙ ДИНАМІЧНИЙ АНАЛІЗ ПОЛОГИХ ОБОЛОНОК ІЗ ФУНКЦІОНАЛЬНО ГРАДІЄНТНИХ МАТЕРІАЛІВ З ПАРАМЕТРАМИ, ЗАЛЕЖНИМИ ВІД ЧАСУ, ПІД ДІЄЮ СТАТИЧНИХ ЗУСИЛЬ

Грищак В. З., д. т. н., професор, Фатеева Ю. О., аспірант

*Запорізький національний університет,  
вул. Жуковського, 66, Запоріжжя, 69600, Україна*

fateevajulia@gmail.com

Стаття присвячена нелінійним коливанням пологих оболонок із функціонально градієнтних матеріалів (ФГМ) під дією статичних зусиль. Властивості матеріалу змінюються в напрямку товщини відповідно до степеневого закону. Нелінійні залежності деформації-переміщення ґрунтуються на теорії Кармана для відносно великих нормальних переміщень. Початкова нелінійна система диференціальних рівнянь трансформується до сингулярного нелінійного диференціального рівняння зі змінними за часом коефіцієнтами, яке вирішується гібридним трикроковим збуренням – ВКБ-Гальоркін методом. Надається порівняння результатів чисельного інтегрування основного рівняння проблеми із запропонованим наближеним аналітичним розв'язком.

*Ключові слова: асимптотичний підхід, нелінійна динамічна проблема, ФГМ пологі оболонки, залежні від часу параметри.*

## НЕЛИНЕЙНЫЙ ДИНАМИЧЕСКИЙ АНАЛИЗ ПОЛОГИХ ОБОЛОЧЕК ИЗ ФУНКЦИОНАЛЬНО ГРАДИЕНТНЫХ МАТЕРИАЛОВ С ПАРАМЕТРАМИ, ЗАВИСЯЩИМИ ОТ ВРЕМЕНИ, ПОД ДЕЙСТВИЕМ СТАТИЧЕСКИХ НАГРУЗОК

Грищак В. З., д. т. н., профессор, Фатеева Ю. А., аспирант

*Запорожский национальный университет,  
ул. Жуковского, 66, Запорожье, 69600, Украина*

fateevajulia@gmail.com

Данная статья посвящена нелинейным колебаниям пологих оболочек из функционально градиентных материалов (ФГМ) под действием статических усилий. Свойства материала изменяются по толщине в соответствии со степенным законом. Нелинейные зависимости деформации-перемещения основаны на теории Кармана для относительно больших перемещений. Исходная нелинейная система дифференциальных уравнений преобразуется к сингулярному нелинейному дифференциальному уравнению с переменными во времени коэффициентами, которое решается гибридным трехшаговым возмущением – ВКБ-Галеркин методом. Дается сравнение результатов численного интегрирования основного уравнения проблемы с предложенным приближенным аналитическим решением.

*Ключевые слова: асимптотический поход, нелинейная динамическая проблема, ФГМ пологие оболочки, зависящие от времени параметры.*

### INTRODUCTION

Thin walled structures made of functionally graded materials (FGM) with metal inner surface and ceramic in outer surface are widely used, for example, in modern air-space systems, shipbuilding, electronics and other fields of science and technology because of their flexibility in design to have desired strength and durability.

FGMs are the heterogeneous composite materials in which the material properties are changing in the thickness direction or discontinuous as a stepwise gradation of the material constituents [1, 2, 4, 11]. Composite shell structures which are used for modern flying apparatus undergo large deflection and/or static and nonlinear dynamic external mechanical loads. That is why it is important to take into account the geometrically nonlinear effects to ensure more accurate structural analysis and design. In recent years, important studies about vibration and stability of FGM plates and shells under static, dynamic loading and in high temperature environment have been carried out, with using mostly numerical approaches [1-6, 17-19] and just few ones deal with analytical-numerical approaches [12-15].

The present paper deals with an approximate analytical solution of nonlinear dynamic problem of FGM imperfect shallow shells based upon the von Karman theory for moderately large normal deflections with time dependent parameters (for example, with thickness depending on time) on the basis of hybrid (P-WKB) asymptotic method, which was successfully applied earlier [7-10, 16, 20, 21].

### FORMULATION OF THE PROBLEM. AN APPROXIMATE ANALYTICAL SOLUTION

Suppose the FGM imperfect shallow shell is simply supported at its edges and subjected to a transverse load  $q_0(t)$  and compressive edge loads  $r_0(t)$ ,  $p_0(t)$ . With respect to paper [1, 9, 10, 16] it is assumed that modulus of elasticity and the mass density changes in the thickness direction, while the Poisson ratio is assumed to be constant and thickness of shell is function of time. In this analysis, some mechanical properties of shell material are function of time. For this reason, mathematical model became more complicated from the point of view for analytical solution.

In the spirit of [1] consider that initial imperfections in the middle shell surface, a system of nonlinear differential equations for functions of the normal stress and displacement based on the von Karman theory for large deflections are:

$$\begin{aligned} \rho_1 \frac{\partial^2 w}{\partial t^2} + \frac{E_1 E_3 - E_2^2}{E_1 (1 - \nu^2)} \Delta \Delta (w - w_0) + 2 \frac{\partial^2 \varphi}{\partial x_1 \partial x_2} \frac{\partial^2 w}{\partial x_1 \partial x_2} - \frac{\partial^2 \varphi}{\partial x_2^2} \frac{\partial^2 w}{\partial x_1^2} - \frac{\partial^2 \varphi}{\partial x_1^2} \frac{\partial^2 w}{\partial x_2^2} - k_2 \frac{\partial^2 \varphi}{\partial x_1^2} - k_1 \frac{\partial^2 \varphi}{\partial x_2^2} = q_0, \\ \frac{1}{E_1} \Delta \Delta \varphi = -k_1 \frac{\partial^2 (w - w_0)}{\partial x_2^2} - k_2 \frac{\partial^2 (w - w_0)}{\partial x_1^2} + \left[ \left( \frac{\partial^2 w}{\partial x_1 \partial x_2} \right)^2 - \frac{\partial^2 w}{\partial x_1^2} \cdot \frac{\partial^2 w}{\partial x_2^2} \right] - \left[ \left( \frac{\partial^2 w_0}{\partial x_1 \partial x_2} \right)^2 - \frac{\partial^2 w_0}{\partial x_1^2} \cdot \frac{\partial^2 w_0}{\partial x_2^2} \right] = 0, \end{aligned} \quad (1)$$

where  $q_0$  is intensity of transverse load,  $\varphi$  is stress function  $w$  is deflection.

For the given boundary conditions the deflection function  $w = (x_1, x_2, t)$  is chosen here as

$$w(x_1, x_2, t) = f(t) \sin \frac{m\pi x_1}{a} \sin \frac{n\pi x_2}{b}. \quad (2)$$

The regular initial imperfection of middle surface of shell are taken in the form

$$w_0(x_1, x_2) = f_0 \sin \frac{m\pi x_1}{a} \sin \frac{n\pi x_2}{b}, \quad (3)$$

where  $f_0$  is the amplitude of initial imperfection.

Then, applying the Bubnov-Galerkin procedure to the Karman equations (1), we obtain the nonlinear second order ordinary differential equation with variable in time coefficients for function  $f(t)$  in the following form:

$$\begin{aligned} \varepsilon^2 \frac{d^2 f}{dt^2} + f \left( 1 + 2f_0 \bar{A}_2(t) - \bar{A}_3(t) f_0^2 - \bar{A}_1(t) \right) + f^2 \left( -3\bar{A}_2(t) \right) + f^3 \bar{A}_3(t) = \\ = Q_0 - \bar{A}_0(t) + f_0 - \bar{A}_2(t) f_0^2, \end{aligned} \quad (4)$$

where

$$\begin{aligned} \varepsilon^2 = \frac{1}{\omega_{mn}^2}, \quad A_0(t) = \frac{16h(t)}{\pi^2 mn} (k_1 r_0 + k_2 p_0), \quad A_1(t) = \frac{\pi^2 h(t)}{a^2} (m^2 r_0 + n^2 \lambda^2 p_0), \\ A_2(t) = \frac{16E_1(t) mn \lambda^2 (k_1 n^2 \lambda^2 + k_2 m^2)}{3a^2 (m^2 + n^2 \lambda^2)^2}, \quad A_3(t) = \frac{512E_1(t) m^2 n^2 \lambda^4}{9a^4 (m^2 + n^2 \lambda^2)^2}, \quad \bar{A}_i = \frac{A_i}{\omega_{mn}^2}, \end{aligned} \quad (5)$$

$$\omega_{mn}^2 = \frac{1}{\rho_1(t)} \left[ \frac{(E_1 E_3 - E_2^2)}{E_1 (1 - \nu^2)} \cdot \frac{(m^2 + n^2 \lambda^2) \pi^2}{a^4} + \frac{E_1 (k_1 n^2 \lambda^2 + k_2 m^2)^2}{(m^2 + n^2 \lambda^2)^2} \right],$$

$$E(t) = \left( E_m + \frac{E_c - E_m}{k + 1} \right) h(t), \quad \rho = \left( \rho_m + \frac{\rho_c - \rho_m}{k + 1} \right) h(t), \quad \nu(z) = const,$$

where  $k_1, k_2$  are curvatures of middle surface shell in  $x_1$  and  $x_2$  directions,  $E(t)$  is Young's modulus,  $\rho$  is mass density,  $\nu(z)$  – Poisson's ratio,  $h(t)$  is thickness of construction, which is depends of time. The volume-fractions of the metal and ceramic phases base by power law  $V_m + V_c = 1$ , ( $m$  – belongs to metal,  $c$  – to ceramic),  $V_c$  can be express as  $V_c = \left( \frac{2z + h(t)}{2h(t)} \right)^k$ ,  $k$  is the volume-fraction exponent ( $k \geq 0$ ).

Basic differential equation (4) is rewritten in the form

$$\varepsilon^2 \frac{d^2 f}{dt^2} + B_1(t) f + \mu (B_2(t) f^2 + B_3(t) f^3) = \bar{Q}_0(t), \tag{6}$$

where

$$B_1(t) = 1 + 2f_0 \bar{A}_2(t) - \bar{A}_3(t) f_0^2 - \bar{A}_1(t), \quad B_2(t) = \frac{-3}{\mu} \bar{A}_2(t), \quad B_3(t) = \frac{1}{\mu} \bar{A}_3(t), \tag{7}$$

$$\bar{Q}_0(t) = Q_0 - \bar{A}_0(t) + f_0 - \bar{A}_2(t) f_0^2,$$

$\varepsilon, \mu$  are small parameters.

According to the perturbation method with respect to the parameter of nonlinearity  $\mu$ , a solution of the differential equation (6) is presented in the form of the following two terms approximation [7]:

$$f(t) = \varphi_0(t) + \mu \varphi_1(t). \tag{8}$$

Substituting (7) into equation (5) and acquainted the terms with the same order of the small parameter we obtain the system equations for unknown functions  $\varphi_0(t)$  and  $\varphi_1(t)$ :

$$\mu^0: \quad \varepsilon^2 \varphi_0''(t) + B_1(t) \varphi_0 = \bar{Q}_0, \tag{9}$$

$$\mu^1: \quad \varepsilon^2 \varphi_1''(t) + B_1(t) \varphi_1 = -B_2(t) \varphi_0^2 - B_3(t) \varphi_0^3. \tag{10}$$

The system of ordinary singular differential equations with variable in time coefficient  $B_1$  is solved by two terms WKB-approximation [5]. Finally, we have obtained the solution of nonlinear problem on the basis of the perturbation two-terms WKB method as

$$f(t) = \varphi_0(t) + \mu \varphi_1(t) = \sin K(t) (c_1 + \bar{c}_1(t)) + \cos K(t) (c_2 + \bar{c}_2(t)) +$$

$$+ \mu (\sin K(t) (d_1 + \bar{d}_1(t)) + \cos K(t) (d_2 + \bar{d}_2(t))) = \tag{11}$$

$$= B_1(t)^{0.25} \left\{ \sin K(t) [c_1 + \bar{c}_1(t) + \mu \bar{d}_1(t)] + \cos K(t) [c_2 + \bar{c}_2(t) + \mu \bar{d}_2(t)] \right\},$$

where

$$K(t) = \int \varepsilon^{-1} B_1^{\frac{1}{2}}(t) dt, \tag{12}$$

$$\bar{c}_1(t) = \varepsilon \int \frac{\bar{Q}_0(t) \cos K(t)}{B_1^{0.25}(t)} dt, \quad \bar{c}_2(t) = -\varepsilon \int \frac{\bar{Q}_0(t) \sin K(t)}{B_1^{0.25}(t)} dt, \tag{13}$$

$$\bar{d}_1(t) = \varepsilon \int \frac{(-B_2(t)\varphi_0^2 - B_3(t)\varphi_0^3)\bar{Q}_0(t)\cos K(t)}{B(t)^{-0.25}} dt, \quad (14)$$

$$\bar{d}_2(t) = -\varepsilon \int \frac{(-B_2(t)\varphi_0^2 - B_3(t)\varphi_0^3)\bar{Q}_0(t)\sin K(t)}{B_1(t)^{-0.25}} dt. \quad (15)$$

Initial conditions are taken in the following form:

$$\begin{aligned} \varphi(0) &= 1, \\ \varphi'(0) &= 0. \end{aligned} \quad (16)$$

In the third step on the hybrid (P-WKB-G) asymptotic method we will keep the perturbation functions but replaced the gauge functions by new amplitudes which depend on  $\varepsilon$ . In the Bubnov-Galerkin orthogonally principle one seeks an approximate solution in the form of a linear combination of specified (known) coordinate functions with unknown amplitude  $\delta_0$  which is a function of  $\varepsilon$ :

$$f_H(t, \varepsilon) = \exp \int \delta_0(\varepsilon) \varphi_0(t) dt, \quad (17)$$

where

$$\delta_{0,1,2} = -\frac{\bar{Q}_0(b) - \bar{Q}_0(a)}{\pm 4 \int_a^b \left( i \bar{Q}_0(t)^{\frac{3}{2}} \right) dx} \pm \sqrt{\left( \frac{\bar{Q}_0(b) - \bar{Q}_0(a)}{4 \int_a^b \left( i \bar{Q}_0(t)^{\frac{3}{2}} \right) dx} \right)^2 - \frac{1}{\varepsilon^2}}. \quad (18)$$

The result of three-step hybrid asymptotic solution of initial non-homogeneous nonlinear differential equation with variable coefficients for function  $f^H(t)$  is given in the following form:

$$\begin{aligned} f^H(t) &= B_1(t) \left\{ \sin I^H(t, \delta_{0,1}) \left[ c_1 + \bar{c}_1(\bar{Q}_0(t), N(f_0)) \right] + \right. \\ &\quad \left. + \cos I^H(t, \delta_{0,2}) \left[ c_2 + \bar{c}_2(Q_0(t), N(f_0)) \right] \right\}, \end{aligned} \quad (19)$$

where

$$I^H(t) = \pm \int \delta_{0,1,2} i Q_0(t)^{1/2} dt. \quad (20)$$

### INFLUENCE OF STATIC LOADING AND INITIAL IMPERFECTION OF THE MIDDLE SHELL SURFACE

In this section, we presented the influence of static loading and imperfections of the middle shell surface, where thickness given in form (21). On the Figure 1 there is comparison of asymptotic solution with direct numerical calculation of initial equation, where parameter of static loading is 0.5, amplitude of imperfection is 0.1. On the Figure 2 there is a mold of imperfect shell under static loading, where forced vibration function and parameter  $a$  are given by relations (22), (23) respectively. Shapes of shell vibrations for different wave numbers are presented on the Figure 3-9.

$$h(t) = h_0(1 - \eta t), \quad (21)$$

$$Q_0 = \sin \Omega t, \quad (22)$$

$$a = k_1 p_0 + k_2 r_0. \quad (23)$$

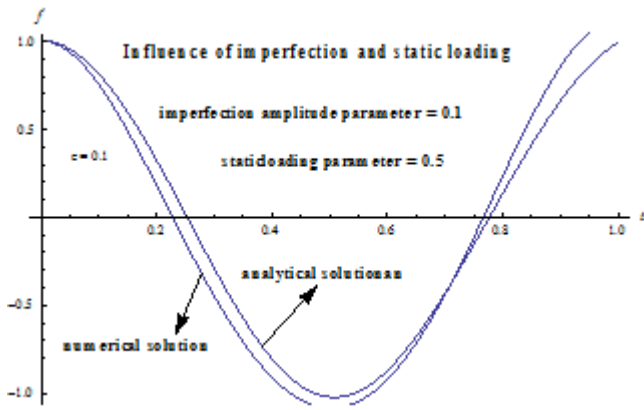


Fig. 1. Comparison of analytical and numerical solutions

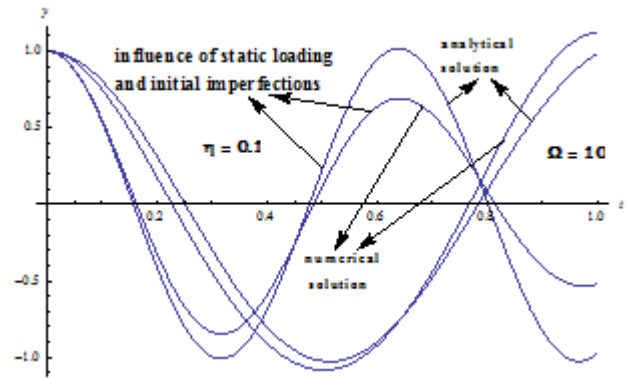


Fig. 2. Influence of static loading and initial imperfection parameters

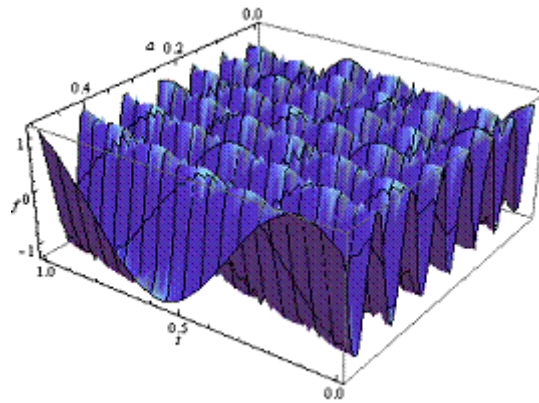


Fig. 3. Vibration mold of imperfect shell under static loading

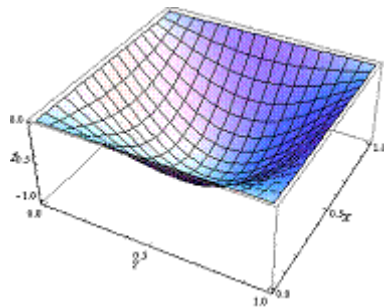


Fig. 4. Shapes of shell vibrations for:  
 $m=1, n=1, t=0.5, a=0.1$

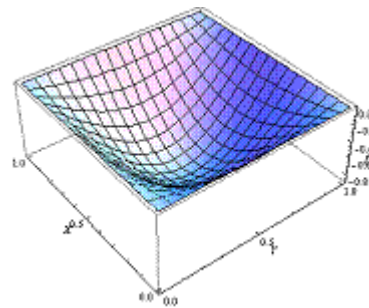


Fig. 5. Shapes of shell vibrations for:  
 $m=1, n=1, t=0.5, a=0.2$

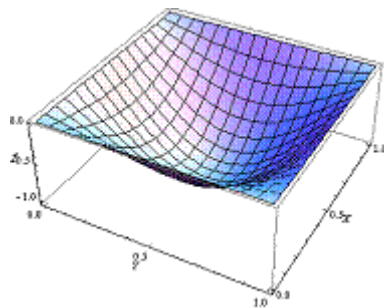


Fig. 6. Shapes of shell vibrations for:  
 $m=1, n=1, t=0.5, a=0.25$

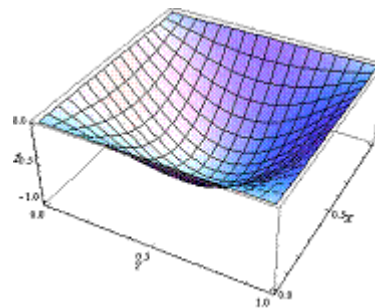


Fig. 7. Shapes of shell vibrations for:  
 $m=1, n=1, t=0.5, a=0.5$

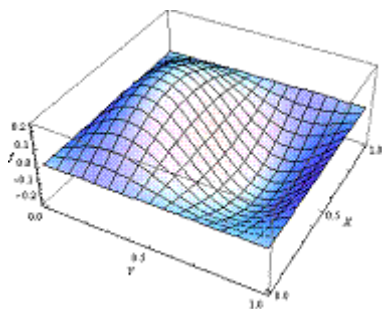


Fig. 8. Shapes of shell vibrations for:  
 $m = 2, n = 1, t = 0.5, a = 0.1$

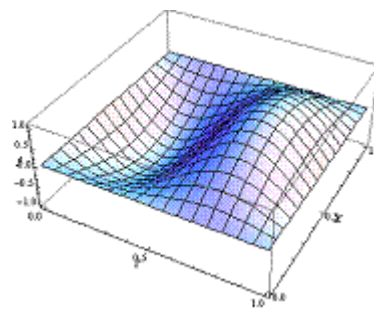


Fig. 9. Shapes of shell vibrations for:  
 $m = 2, n = 1, t = 0.5, a = 0.5$

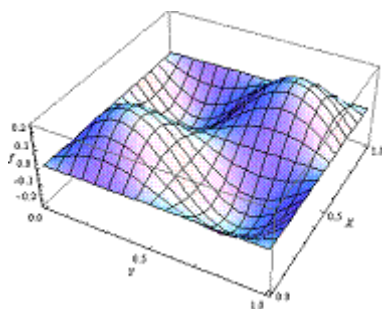


Fig. 10. Shapes of shell vibrations for:  
 $m = 2, n = 1, t = 0.5, a = 0.8$

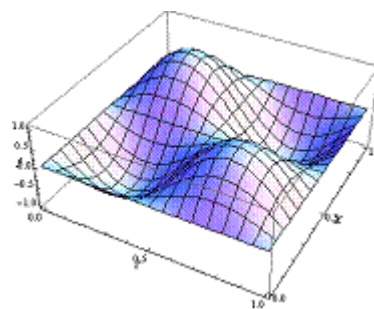


Fig. 11. Shapes of shell vibrations for:  
 $m = 2, n = 1, t = 0.5, a = 0.6$

## CONCLUSIONS

An approximate analytical solution for forced vibrations of non-linear FGM shallow cylindrical shells with time dependent thickness on the basis of hybrid perturbation-two-terms WKB approximation method are obtained. In particularly influence of static loading parameter leads to changing of vibration shapes of structure. For some parameters of structure, analytical solutions are in a good enough correlations with direct numerical simulation of initial nonlinear differential equation with variable in time coefficients. Further investigations will be devoted to analyze the nonlinear dynamic behavior of complex shape FGM shell including temperature effects.

## REFERENCES

1. Dao Huy Bich. Nonlinear Dynamical Analysis of Imperfect Functionally Graded Materials Shallow Shells / Dao Huy Bich, Yu Do Long // Int. Vietnam Journal of Mechanics. – 2010 – P. 1-14.
2. Vu Thi Thuy Anh. Nonlinear Axisymmetric Response of Thin FGM Shallow Spherical Shells with Ceramic-Metal-Ceramic Layers under External Pressure and Temperature / Vu Thi Thuy Anh, Nguyen Dinh Duc // Int. VNU Journal of Mathematics, physics. – 2013 – P. 1-15.
3. Katarzhyna Kowal-Michalska. Static and Dynamic Thermomechanical Buckling Load of Functionally Graded Plate / Katarzhyna Kowal-Michalska, Radoslaw J. Mania // Int. Mechanics and Mechanical Engineering, – 2013 – P. 99-112.
4. Khaire P. D. Nonlinear Free Vibration Response of FGM Cylindrical Shell in Thermal Environment / P. D. Khaire, N. H. Amhore, K. R. Jagtap // Int. Journal on Mech. Engineering and Robotics. – 2014 – Vol. 2. – P. 37-41.
5. Kurpa L. V. Determination of eigen frequencies of functionally graded material shallow shells with using of R-function and spline-approximation. / L. V. Kurpa, A. A. Osetrov, T. V. Shmatko // Int. Announcer of NTU KhPI. – 2014. – Vol. 6. – P. 99-111.
6. Stronzzi M. Nonlinear Vibrations of Functionally Graded Shells Subjected Harmonic External Load / M. Stronzzi, F. Pellicano // Proc. 4-th Int. Conf. on Nonlinear Dynamics, Sevastopol. – 2014. – P. 341-346.
7. Geer J. F. Natural Frequency Calculations Using a Hybrid Perturbation Galerkin Technique / J. F. Geer, C. V. Andersen // Pan-American Congress on Appl. Mech. – 1991. – P. 571-574.

8. Gristchak V. Z. A Hybrid WKB-Galerkin Method Applied to a Piezoelectric Sandwich Plate Vibration Problem Considering Shear Force Effects / V. Z. Gristchak, O. A. Ganilova // *Journal of Sound and Vibration*. – 2008. – Vol. 317. – P. 366-377.
9. Грищак В. З. Влияние начальных несовершенств на нелинейное динамическое поведение оболочечных конструкций из функционально-градиентных материалов переменной во времени толщины / В. З. Грищак, Ю. А. Фатеева // *Вестник ЗНУ. Физико-математические науки*. – 2015. – № 3. – С. 58-66.
10. Gristchak V. Z. An approximate analytical solution for nonlinear FGM Shell structure with variable in time parameters / V. Z. Gristchak, Yu. A. Fatieieva // *ECCOMAS Congress 2016, VII European Congress on Computational Methods in Applied Sciences and Engineering*. Crete Island, Greece, 5-10 June 2016. – 2016. – Vol. 4, № 4. – P. 8654-8664.
11. Swaminathan K. Stress, vibration and buckling analyses of FGM plates / K. Swaminathan, D. T. Naveenkumar // *Int. A state-of-the-art review Composite Structures*. – 2015. – Vol. 120. – P. 10-31.
12. Obata Y. Transient thermal stresses in a plate of functionally gradient material / Y. Obata, N. Noba // *Int. Ceramic Trans Funct Grad Mater*. – 1993. – Vol. 34. – P. 403-410.
13. Aboudi J. Response of functionally graded to thermal gradients / J. Aboudi, S. M. Arnold, M. J. Pindara // *Int. Compos. Eng*. – 1994. – Vol. 4, № 1. – P. 1-18.
14. Aboudi J. Thermo-inelastic response of functionally graded composites / J. Aboudi, M. J. Pindara, S. M. Arnold // *Int. J Solids Struct*. – 1995. – Vol. 32, № 12. – P. 675-710.
15. Aboudi J. A coupled higher-order theory for functionally graded composites with partial homogenization / J. Aboudi, M. J. Pindara, S. M. Arnold // *Int. Compos. Eng*. – 1995. – Vol. 5, № 7. – P. 771-992.
16. Gristchak V. Z. An approximate analytical solution of vibration problem for imperfect FGM shallow shell with time dependent thickness under static loading / V. Z. Gristchak, Y. A. Fatieieva // *Int. 5<sup>th</sup> INTERNATIONAL CONFERENCE NONLINEAR*, V.L. Rvachev, September 27-30, 2016. – 2016. – Vol. 1. – P. 298.
17. Dao Huy Bich. Nonlinear static and dynamic buckling analysis of functionally graded shallow spherical shells including temperature effects / Dao Huy Bich, Dao Van Dung, Le Kha Hoa // *Int. Vietnam Journal of Mechanics*. – 2012. – P. 2952-2962.
18. Hoang Van Tung. Nonlinear thermomechanical stability of shear deformable FGM shallow spherical shells resting on elastic foundations with temperature dependent properties / Van Tung Hoang // *Int. Composite Structures*. – 2014. – 114. – P. 107-116.
19. Nguyen Dinh Duc. Nonlinear response of imperfect eccentrically stiffened ceramic-metal-ceramic FGM thin circular cylindrical shells surrounded on elastic foundations and subjected to axial compression / Dinh Duc Nguyen, Toan Thang Pham // *Int. Composite Structures*. – 2014. – 110. – P. 200-206.
20. Gristchak V. Z. Influence of initial imperfections on nonlinear dynamic behavior of functionally graded material shell structures with variable in time thickness / V. Z. Gristchak, Y. A. Fatieieva // *Visnyk of Zaporizhzhya National University. Physical and Mathematical Sciences*. – 2015. – No 3. – P. 58-66.
21. Fatieieva Yu. Influence of external periodic oscillation of a shallow shell structures made of FGM with variable thickness in time / Y. A. Fatieieva // *Visnyk of Zaporizhzhya National University. Physical and Mathematical Sciences*. – 2016. – No 1. – P. 251-256.

## REFERENCES

1. Dao Huy Bich and Yu Do Long (2010), “Nonlinear Dynamical Analysis of Imperfect Functionally Graded Materials Shallow Shells”, *Int. Vietnam Journal of Mechanics*, pp. 1-14.
2. Vu Thi Thuy Anh and Nguyen Dinh Duc (2013), “Nonlinear Axisymmetric Response of Thin FGM Shallow Spherical Shells with Ceramic-Metal-Ceramic Layers under External Pressure and Temperature”, *Int. VNU Journal of Mathematics, physics*, pp. 1-15.



3. Katarzhyna, Kowal-Michalska and Radoslaw, J. Mania (2013), "Static and Dynamic Thermomechanical Buckling Load of Functionally Graded Plate", *Int. Mechanics and Mechanical Engineering*, pp. 99-112.
4. Khaire, P.D., Amhore. N.H. and Jagtap, K.R. (2014), "Nonlinear Free Vibration Response of FGM Cylindrical Shell in Thermal Environment", *Int. Journal on Mech. Engineering and Robotics*, vol. 2, pp. 37-41.
5. Kurpa, L.V., Osetrov, A.A. and Shmatko, T.V. (2014), "Determination of eigen frequencies of functionally graded material shallow shells with using of R-function and spline-approximation", *Int. Announcer of NTU KhPI*, vol. 6, pp. 99-111.
6. Stronzzi, M. and Pellicano, F. (2014), "Nonlinear Vibrations of Functionally Graded Shells Subjected Harmonic External Load", *Proc. 4-th Int. Conf. on Nonlinear Dynamics*, Sevastopol, pp. 341-346.
7. Geer, J.F. and Andersen, C.V. (1991), "Natural Frequency Calculations Using a Hybrid Perturbation Galerkin Technique", *Pan-American Congress on Appl. Mech.*, pp. 571-574.
8. Gristchak, V.Z. and Ganilova, O.A. (2008), "A Hybrid WKB-Galerkin Method Applied to a Piezoelectric Sandwich Plate Vibration Problem Considering Shear Force Effects", *Journal of Sound and Vibration*, vol. 317, pp. 366-377.
9. Gristchak, V.Z. and Fatieieva, Yu. (2015), "Influence of initial imperfections on nonlinear dynamic behavior of functionally graded material shell structures with variable in time thickness", *Vestnik ZNU*, no. 3, pp. 58-66.
10. Gristchak, V.Z. and Fatieieva, Yu.A. (2016), "An approximate analytical solution for nonlinear FGM Shell structure with variable in time parameters", *ECCOMAS Congress 2016, VII European Congress on Computational Methods in Applied Sciences and Engineering*, Crete Island, Greece, 5-10 June 2016, vol. 4, no. 4, pp. 8654-8664.
11. Swaminathan, K. and Naveenkumar, D.T. (2015), "Stress, vibration and buckling analyses of FGM plates", *Int. A state-of-the-art review Composite Structures*, vol. 120, pp. 10-31.
12. Obata, Y. and Noba, N. (1993), "Transient thermal stresses in a plate of functionally gradient material", *Int. Ceramic Trans Funct Grad Mater.*, vol. 34, pp. 403-410.
13. Aboudi, J., Arnold, S.M. and Pindara, M.J. (1994), "Response of functionally graded to thermal gradients", *Int. Compos. Eng.*, vol. 4, no. 1, pp. 1-18.
14. Aboudi, J., Thermo-inelastic response of functionallygraded composites / J. Aboudi, M. J. Pindera, S. M. Arnold // *Int. J Solids Struct.* – 1995. – Vol. 32, № 12. – P. 675-710.
15. Aboudi J. Pindara, M.J. and Arnold, S.M. (1995), "A coupled higher-order theory for functionally graded composites with partial homogenization", *Int. Compos. Eng.*, vol. 5, no. 7, pp. 771-992.
16. Gristchak, V.Z. and Fatieieva, Yu.A. (2016), "An approximate analytical solution of vibration problem for imperfect FGM shallow shell with time dependent thickness under static loading", *Int. 5<sup>th</sup> INTERNATIONAL CONFERENCE NONLINEAR V.L. Rvachev*, September 27-30, 2016, vol. 1, pp. 298.
17. Dao Huy Bich, Dao Van Dung and Le Kha Hoa (2012), "Nonlinear static and dynamic buckling analysis of functionally graded shallow spherical shells including temperature effects", *Int. Vietnam Journal of Mechanics*, pp. 2952-2962.
18. Hoang Van Tung (2014), "Nonlinear thermomechanical stability of shear deformable FGM shallow spherical shells resting on elastic foundations with temperature dependent properties", *Int. Composite Structures*, 114, pp. 107-116.
19. Nguyen Dinh Duc and Toan Thang Pham (2014), "Nonlinear response of imperfect eccentrically stiffened ceramic-metal-ceramic FGM thin circular cylindrical shells surrounded on elastic foundations and subjected to axial compression", *Int. Composite Structures*, 110, pp. 200-206.
20. Gristchak, V.Z. and Fatieieva, Yu.A. (2015), "Influence of initial imperfections on nonlinear dynamic behavior of functionally graded material shell structures with variable in time thickness", "Visnyk of Zaporizhzhya National University. Physical and Mathematical Sciences", no. 3, pp. 58-66.
21. Fatieieva, Yu.A. (2016), "Influence of external periodic oscillation of a shallow shell structures made of FGM with variable thickness in time", *Visnyk of Zaporizhzhya National University, Physical and Mathematical Sciences*, no. 1, pp. 251-256.